



Part No.	OP-NFL300-2448 single color	OP-NFL300-2448CCT	OP-NFL300-2448RGB
Light Source	48pcs SMD3030	48pcs SMD3030	48pcs SMD3030
Input Voltage	DC24V	DC24V	DC24V
PCB Width	11MM	12MM	12MM
Cutting Length	20.83MM	41.67MM	125MM
Available Color	red,yellow,blue,green,3000K,4000K,6500K,	3000K+6500K	RGB
Power/meter	18W/M	20W/M	18W/M
Length	20M/Roll or 10M/roll	10M/Roll	10M/Roll
Brightness	80LM/W	80LM/W	70LM/W
Lifespan	5000hrs	5000hrs	5000hrs
Working Temperature	- 20°C - +55°C	- 20°C - +55°C	- 20°C - +55°C
Storage Temperature	- 20°C - +45°C	- 20°C - +45°C	- 20°C - +45°C
Warranty	1 years	1 years	1 years


OP-NFL300-2448 single color:



OP-NFL300-2448CCT:

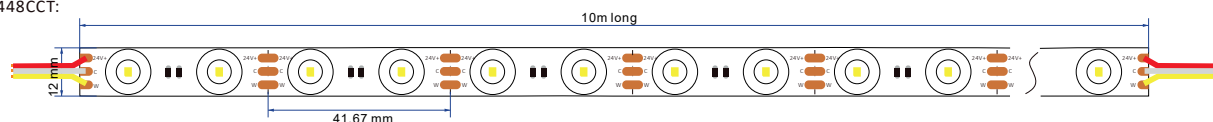

OP-NFL300-2448RGB:

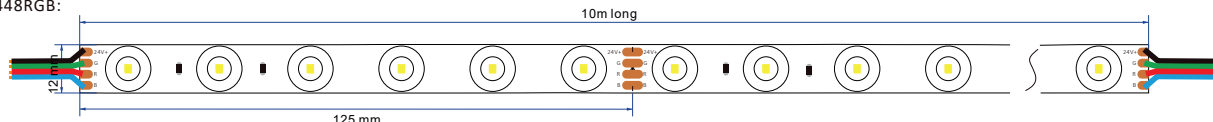


Installation Instruction :


Note:

1. LED strips are delivered in full long rolls. To prevent voltage drop, power feeding is recommended every 2 meters.
2. this product is rated DC24V. A transformer must be used to convert AC110V or AC220V mains power to DC24V before operation. Never connect the LED strip directly to AC110V or AC220V power supply, otherwise the strip will be burnt out.

OP-NFL300-2448 single color:

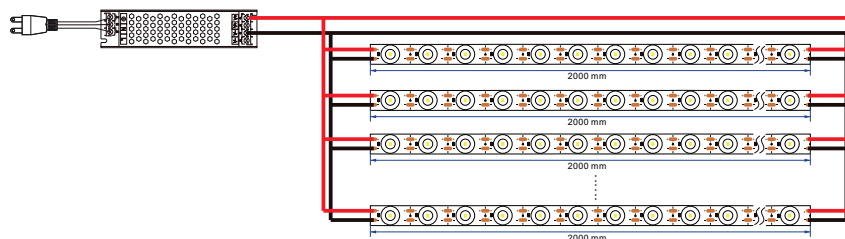

OP-NFL300-2448CCT:

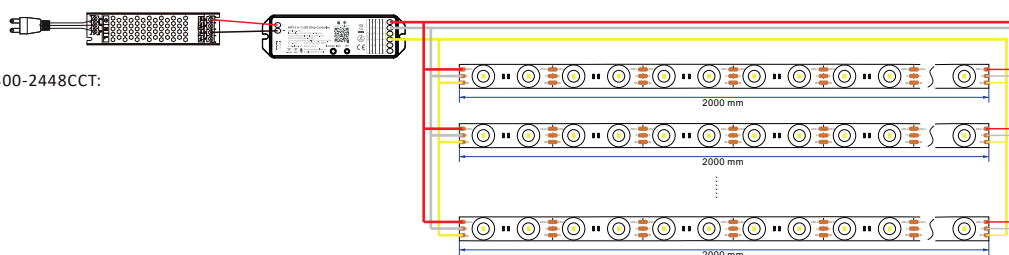

OP-NFL300-2448RGB:

