


L162-2835-12

Size	49*14*7.2mm
Beam angle	160°
Ideal depth	4-10"
Power (W)	0.72W Module
Efficacy	105lm/W
Modules/ft	2.27/ft (fully-stretched) (CTC: 134mm)
Environment	IP66
Operating temp	-40°C to +60°C
Storage temp	-40°C to +70°C
Cascade	20 mods single-ended power feed, 40 mods double-ended power feed
Packaging	Anti-static bag, 100 modules bag
Warranty	3-Year Limited Labor



Profile Drawings

Unit: mm

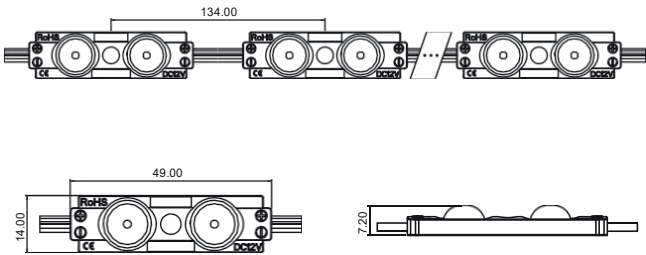


Max Power Supply Load


Power(W)	60W	100W	120W	150W	200W
Quantity(Pcs)	66 mods	111 mods	133 mods	166 mods	222 mods

* Note: Calculated based on 80% of the power load.

Light Distribution

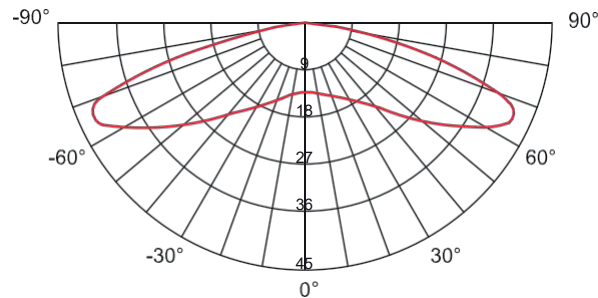

Application Notes

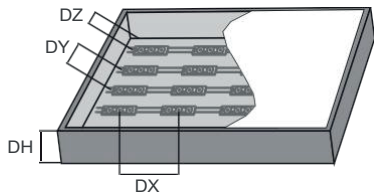

DH (cm/inch)	Total (pcs/m²)
10cm/4"	56PCS
15cm/6"	35PCS
20cm/8"	35PCS

* Note: For multiple rows installation, DZ(margin space) = 1/2 DY