


L163-2835-12

Size	69*14*7.5mm
Beam angle	160°
Ideal depth	4-10"
Power (W)	1.2W Module
Efficacy	100lm/W
Modules/ft	1.98/ft (fully-stretched) (CTC: 154mm)
Environment	IP66
Operating temp	-40°C to +60°C
Storage temp	-40°C to +70°C
Cascade	20 mods single-ended power feed, 40 mods double-ended power feed
Packaging	Anti-static bag, 200 modules bag
Warranty	3-Year Limited Labor



➤ Profile Drawings

Unit: mm

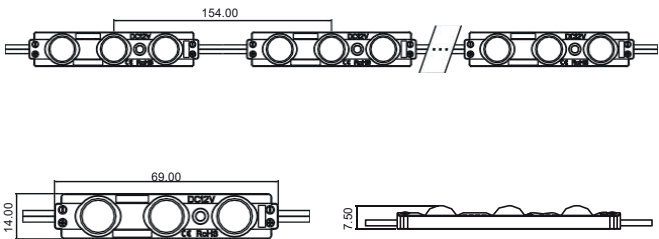


➤ Max Power Supply Load


Power(W)	60W	100W	120W	150W	200W
Quantity(Pcs)	44 mods	74 mods	88 mods	111 mods	148 mods

* Note: Calculated based on 80% of the power load.

➤ Light Distribution

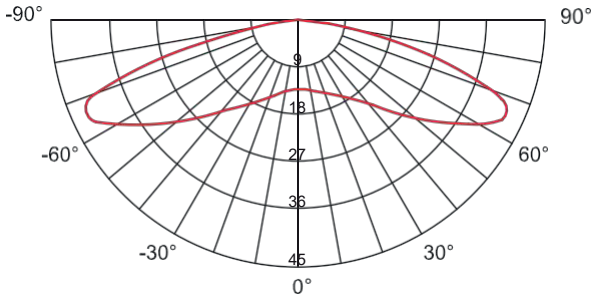

➤ Application Notes

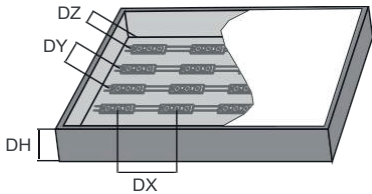

* Note: For multiple rows installation, DZ(margin space) =1/2 DY

DH (cm/inch)	Total (pcs/m²)
10cm/4"	49PCS
15cm/6"	36PCS
20cm/8"	30PCS